

# Hardness Tester TH170



## 🔌 Product Information

**Product info:** • USB communication interface

- Automatic identification of Impact test direction
- Memory of 270 average data in 9 group files
- Upper and lower limit setting
- Automatically switch off
- Backlight for convenient use in darkness
- Software calibration
- Battery capacity display
- AAA 1.5V battery
- Computer software available

# Hardness Tester TH170

## Measuring range

Material	HLD	HRB	HRC	HB	HV	HS
Steel & cast steel	300-900	38.4-99.8	20.0-68.4	81-654	81-955	32.5-99.5
Cold work tool steel	300-840	46.5-101.7	20.4-67.1		80-898	
Stainless steel	300-800			85-655	85-802	
Grey cast. Iron	360-650			93-334		
Nodular cast. Iron	400-660	23.8-84.6		131-387		
Cast AL. Alloys	170-570	13.5-95.3		19-164		
Brass	200-550			40-173		
Bronze	300-700			60-290		
Copper	200-690			45-315		

## Technical specifications

Standard Impact Device	D integrated
Hardness scales	HLD, HB, HRC, HRB, HV, HS
Measuring range / materials	See table above
Measuring direction	360°
Accuracy	±6HLD(760 ±30HLD) ±10HLD(530 ±40HLD)
Memory	270 average readings in 9 group files
Output	USB2.0
Min. Surface Roughness of Workpiece	1.6 μ m ( Ra)
Max. Workpiece Hardness	955HV
Min. radius of Workpiece (convex/concave)	Rmin=50mm (with support ring Rmin=10mm)
Min. workpiece weight	2~5kg on stable support 0.05~2kg with compact coupling
Min. Workpiece thickness coupled	5mm
Min. Thickness of hardened layers	0.8mm
Indentation depth	Impact Device data (see page 8)
Continuous working time	150 h (without backlight)
Power	AAA 1.5V batteries (2pcs)
Operating temperature	0~40°C

# Hardness Tester TH170

## Standard delivery


- Main unit integrated with Impact Device D 1
- Test block with HLD value 1
- Cleaning brush 1
- Battery AAA 1.5V 2
- TIME certificate 1
- Instruction manual 1
- Warranty card 1
- Carrying case 1

## Optional accessories

- Support rings

# Hardness Tester TH170

## Optional Support Rings

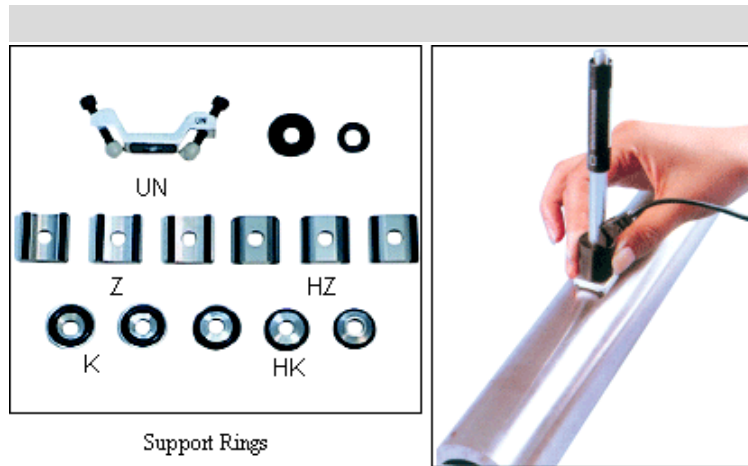

### Product Information

No.	Type	Sketch of non-conventional supporting ring	Remarks
1	Z10-15		For testing cylindrical outside surface R10~R15
2	Z14.5-30		For testing cylindrical outside surface R14.5~R30
3	Z25-50		For testing cylindrical outside surface R25~R50
4	HZ11-13		For testing cylindrical inside surface R11~R13
5	HZ12.5-17		For testing cylindrical inside surface R12.5~R17
6	HZ16.5-30		For testing cylindrical inside surface R16.5~R30
7	K10-15		For testing spherical outside surface SR10~SR15
8	K14.5-30		For testing spherical outside surface SR14.5~SR30
9	HK11-13		For testing spherical inside surface SR11~SR13
10	HK12.5-17		For testing spherical inside surface SR12.5~SR17
11	HK16.5-30		For testing spherical inside surface SR16.5~SR30
12	UN		For testing cylindrical outside surface, radius adjustable R10~∞